

THIS MANUAL IS FOR THE FOLLOWING MODELS

Dieses Handbuch gilt für die folgenden Modelle | Ce manuel concerne les modèles suivants | Este manual es para los siguientes modelos | 此手册适用于以下型号

PH-NV5x_DBK01_CP Satin Black
PH-NV5x_DWT01_CP Matte White

Legenda

Legende | Légende | Leyenda | 操作说明

Remove | Entfernen | Retirer | Eliminar | 移除
Install | Installieren | Installer | Instalar | 安装
Loosen | Lösen | Desserrer | Aflojar | 拧松


EN Phanteks will not take responsibility for any damages incurred due to incorrect installation or usage of this product.

DE Phanteks übernimmt keine Verantwortung für Schäden, die durch eine falsche Installation oder Verwendung dieses Produkts entstehen.

FR Phanteks décline toute responsabilité en cas de dommages résultant d'une installation ou d'une utilisation incorrecte de ce produit.


ES Phanteks no se responsabilizará de los daños ocasionados por la instalación o el uso incorrectos de este producto.

CN Phanteks 不会对安装中失误造成的任何损失负责, 请仔细阅读本手册。

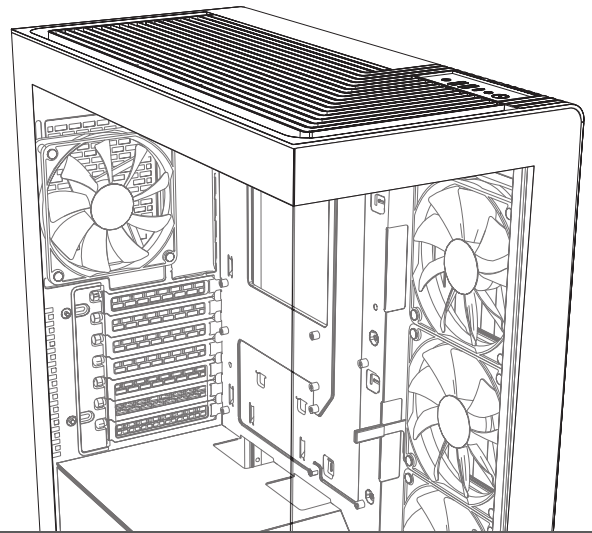


SCOPE OF DELIVERY

Lieferumfang | Contenu de la livraison | Alcance de la entrega | 供货范围



Motherboard Stand-off
主板备用螺柱
x1




PSU Screw
电源螺丝
x4




Ziptie
理线扎带
x6



Motherboard/SSD Screw
主板/SSD螺丝
x22




Stand-off Removal Tool
拆装螺柱辅助工具
x1



NV5x
x1


HDD Installation Accessories
硬盘安装配件



HDD Screw
HDD硬盘螺丝
x4




HDD Rubber
HDD软胶垫
x4



HDD Screw Stand-off
HDD螺丝
x4

FRONT I/O

Vorne I/O | I/O avant | I/O frontal | 机箱 I/O

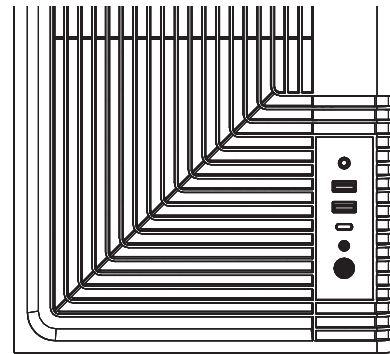

English

- 1 Audio | Microphone
- 2 USB 3.0
- 3 USB C 3.1
- 4 Reset Button
- 5 Power Button

Deutsch

- 1 Audio | Mikrofon
- 2 USB 3.0
- 3 USB C 3.1
- 4 Reset-Knopf
- 5 Power-Taste

Français

- 1 Audio | Microphone
- 2 USB 3.0
- 3 USB C 3.1
- 4 Bouton de réinitialisation
- 5 Bouton d'alimentation

Española

- 1 Sonido | Micrófono
- 2 USB 3.0
- 3 USB C 3.1
- 4 Botón de reinicio
- 5 Botón de encendido

中文

- 1 耳机 | 麦克风二合一
- 2 USB 3.0
- 3 USB C 3.1
- 4 重启键
- 5 开机键

CLEARANCE

Spielraum | Autorisation | Autorización | 安装空间

Fans | Fans | Ventilateurs | Ventiladores | 风扇

	Top Spitze Haut Arriba 顶	Side Seite Côté Lado 侧	Bottom Unterseite Bas Abajo 底 Rückseite	Rear Arrière Trasera 后
120mm	3x	3x	-	1x
140mm	-	-	-	-

Radiator | Kühler | Radiateur | Radiador | 水冷排

120mm	Up to 360 & 240	Up to 360 & 240	-	max. 120
140mm	-	-	-	-

Clearance | Spielraum | Autorisation | Autorización | 间隙


CPU Cooler _____ 170 mm Height
GPU _____ 400 mm Length
Power Supply _____ 140x200 mm Length
Radiator _____ Up to 360 & 240

PANEL REMOVAL

Ausbau des Panels | Retrait du panneau | Eliminación de paneles | 移除面板


01 Top Panel

Oberes Bedienfeld | Pannau supérieur | Panel superior | 顶部面板

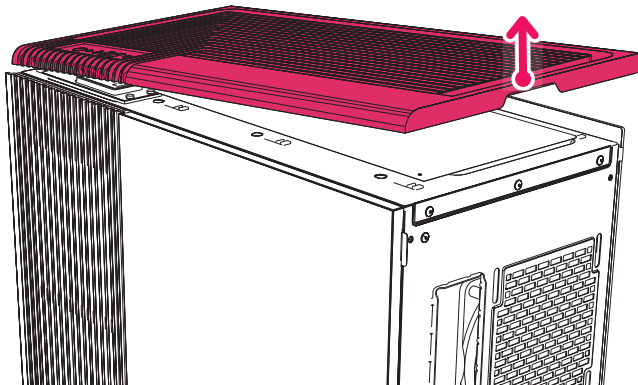


02 Left Side Panel

Linke Seitenwand | Pannau latéral gauche | Panel lateral izquierdo | 左侧面板

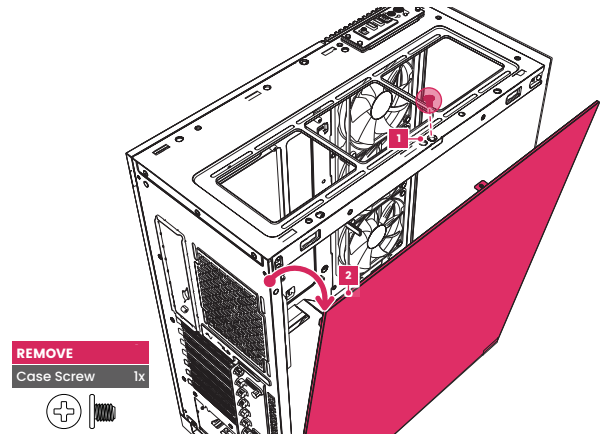


03 Right Side Panel

Rechtes Seitenteil | Pannau latéral droit | Panel lateral derecho | 右侧面板

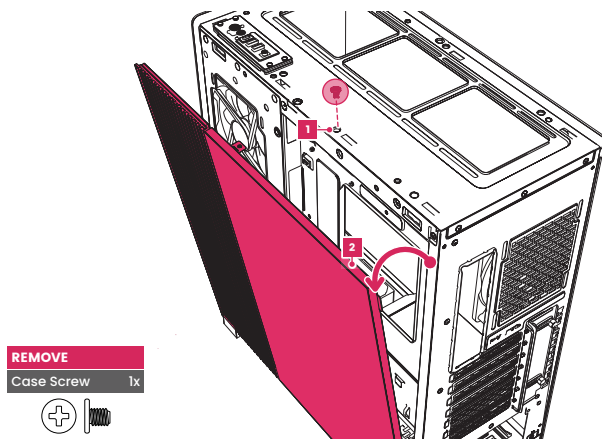


04 Front Panel

Vorderseite | Pannau avant | Panel frontal | 前面板

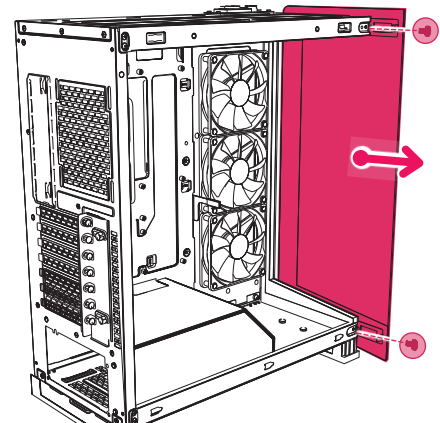


05 POWER SUPPLY COVER

Netzteilabdeckung | Couvercle d'alimentation | Cubierta de la fuente de alimentación | 电源仓盖

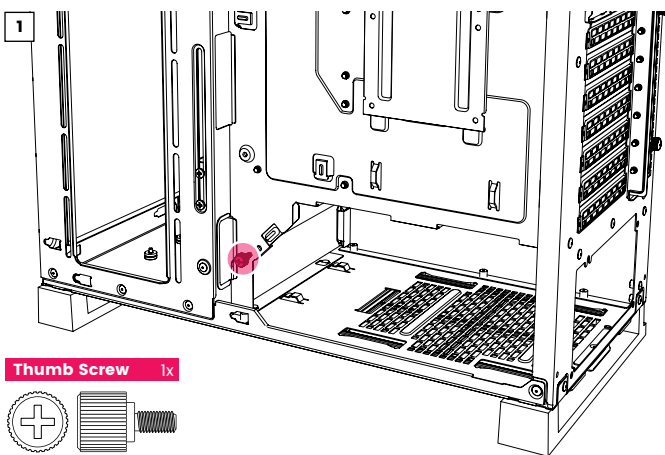

Remove the thumb screws on the oposite side. Slide it to release.
从机箱背部卸下这颗手拧螺丝。

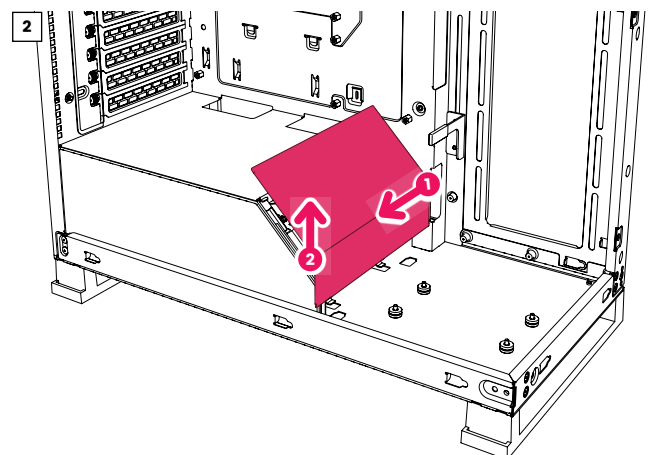


Lift the PSU cover to remove it.
按照图示拆除电源盖板。

HARDWARE INSTALLATION



Hardware-Installation | Installation du matériel | Instalación de hardware | 硬件安装

01 MOTHERBOARD

Hauptplatine | Carte mère | tarjeta madre | 主板




Motherboard Screw 9x

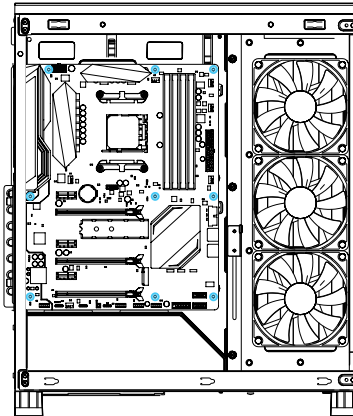

Install the ATX motherboard using 9x motherboard screws. Use the 'stand-off removal tool' to reposition the stand-offs for Micro-ATX Motherboards.
使用9x主板螺丝安装ATX主板。使用“拆装螺钉辅助工具”来重安装Micro-ATX主板螺钉

02 POWER SUPPLY

Stromversorgung | Source de courant | Fuente de alimentación | 电源

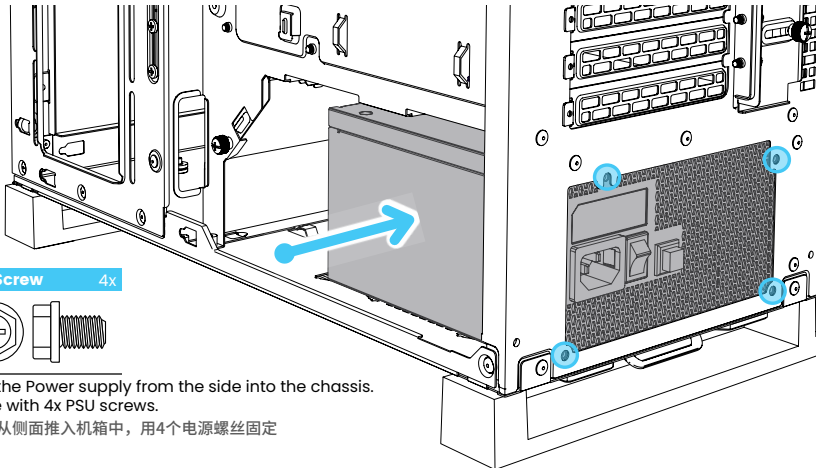

PSU Screw 4x



Insert the Power supply from the side into the chassis.
Secure with 4x PSU screws.
将电源从侧面推入机箱中，用4个电源螺丝固定




PRO TIP


Connect all needed cables to the power supply first for easier installation.
先将所有需要的电缆连接到电源，以方便安装

03 STORAGE | 2.5" SSD

Speicher 2,5-Zoll-SSD | Stockage SSD 2,5" | Almacenamiento SSD de 2,5" | 2.5" SSD 硬盘位

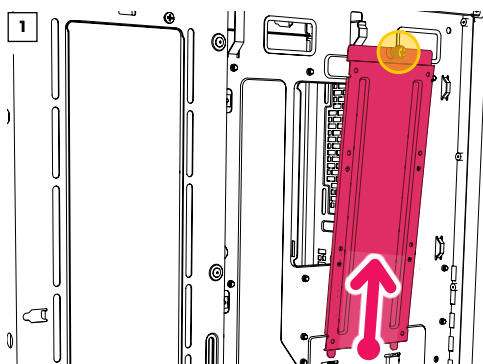

Bracket Screw 1x




PRO TIP

Optional you can remove the storage door for an easier installation process.

可选安装硬盘架，如无硬盘安装，可不安装

Loosen the thumb screw, lift up the bracket to remove it from the chassis.
拧松螺丝，提起支架，将其从底盘上拆下来

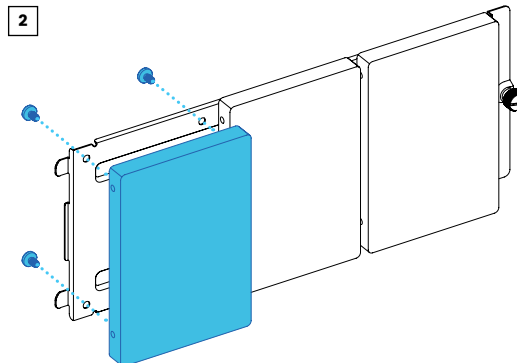


SSD Screw 4x



Secure each SSD with 4x SSD screws.
用4个SSD螺丝固定每个SSD

04 STORAGE | 3.5" HDD

Speicher 3.5-Zoll-HDD | Stockage HDD, 5" | Almacenamiento HDD de 3.5" | 2.5" HDD 硬盘位

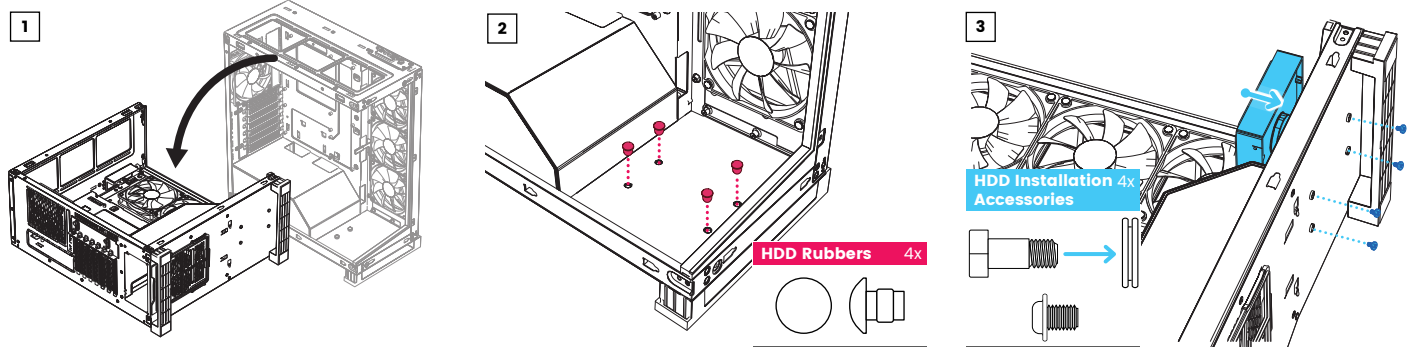

For easy installation we recommend to put the chassis on its side.

为了便于安装，我们建议将机箱侧放。

Remove the HDD rubbers.


拆下硬盘橡胶。

Insert HDD screw standoffs into the rubber washer. Secure the HDD screws standoff and rubber washer to the HDD and place onto the case. Secure the HDD with the 4x HDD screws.

将硬盘螺钉固定件插入橡胶垫圈。将硬盘螺钉固定架和橡胶垫圈固定在硬盘上，再安装在机箱上。用4颗硬盘螺丝固定硬盘。

05 GPU SUPPORT BRACKET

GPU-Halterung | Support de GPU | Soporte de soporte de GPU | 显卡支撑架

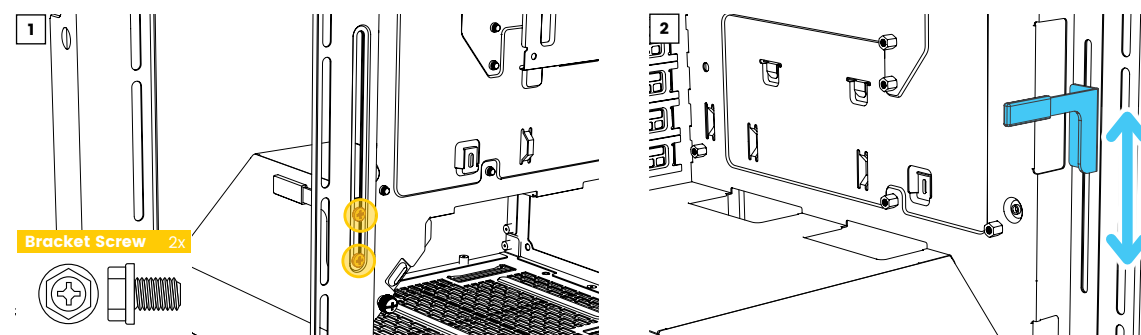

Loosen bracket screws on the other side of the GPU bracket to move the bracket.


拧松机箱背部显卡支架螺丝以便调节支架位置

Adjust the GPU support bracket to secure the GPU in place. For a precise placement, install the GPU first.

调整显卡支撑架，将显卡固定到位。如要精确放置，请先安装显卡

CABLES

Kabel | Câbles | Cabos | 机箱线缆

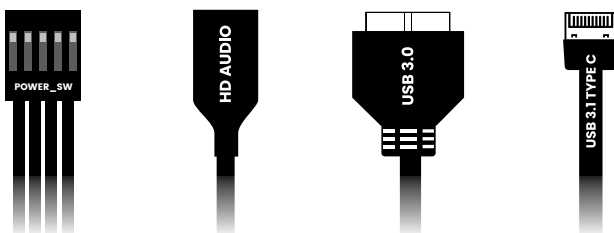

Connect the front I/O cables to the motherboard and power supply.

将前I/O电缆连接到主板和电源。

SAFETY INFORMATION

Sicherheitsinformation | Information de sécurité | Información de seguridad | 安全信息

In order to achieve maximum safety, we suggest that you adopt the following guidelines:

1. Place the product on a clean and stable surface that allows adequate air ventilation.
2. Don't use or place the product and any of its components near water, moisture, or other wet surfaces; or place the product near any heat, open flame, or other hot surfaces such as radiators, stoves, fireplaces, and candles.
3. Use caution when operating the desktop PC to avoid electrical shock or damage, such as unplugging the power supply during thunderstorms, ensuring that your hands are dry before using (and handling) the desktop PC, keeping it away from any source of liquid and/or heat source, and using all other reasonable precautions needed under the circumstances.
4. When connecting external devices to your desktop PC, carefully plan how the wires will be placed. Protect any connected cables from being trod on or pinched, particularly at plugs, convenience receptacles, or the point where they exit from.
5. Take extra caution when handling/removing/reattaching glass components. Once removed, place the glass component on a stable surface first before proceeding.
6. When unplugging any connected devices and/or cables, always pull the cable or device's plug or connector. Don't forcefully tug on its cord.
7. Don't place any heavy items on top of the product.
8. Make sure that the desktop PC is off, unplugged from the outlet, and that all connected devices are powered off and unplugged (if any) before installing or uninstalling any internal component to and/or from the desktop PC or product.

NOTE ON DISPOSAL



The WEEE symbol indicates that this product must not be disposed of with normal household waste. Through the correct disposal of this product, you will help protect the environment. For more information on the disposal of this product, please contact your local municipality, your waste disposal service or the shop where you purchased the product.



FR

Cet appareil se recycle

REPRISE À LA LIVRAISON

À DÉPOSER EN MAGASIN

À DÉPOSER EN DÉCHÈTERIE



Points de collecte sur www.quefairemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

Phanteks Group Inc.
11F, No. 150, Jian 1st Rd,
Zhonghe Dist.
New Taipei City 235

Importer EU
Axpertec Int. B.V. (EU)
Sydneystraat 33
3047 BP Rotterdam
The Netherlands

Importer US
Axpertec Inc. (US)
20465 E Walnut Dr. N
City of Industry, CA 91789
USA